

Sectional flagpoles are made of 2 or more sections joined together using reduction sleeves

Flag display:
 Rotating truck head revolves because of the wind, the flag is always outstretched.

Flag fixing:
 rope with a distance ball, windtracker arm, plastic bands, flag weight

Hoisting and lowering of the flag:
 using internal halyard system with internal cleat or hoisting winch

TUBE PROFILE:
 Sectional aluminum


ANODIZING:
 20 microns

WALL THICKNESS:
 2,5/2,5 mm [5-6m]
 2,5/2,5/3,5 mm [7-10m]
 2,5/2,5/3,5/3 mm [12m]



AVAILABLE ACCESSORIES

FINIALS		WEIGHT [kg]
1	Rotating truck head	0,21
2	Golden bulb/round finial (brass)	0,22
3	Silver bulb/round finial (aluminum)	0,16
4	Black mushroom shaped top (aluminum)	0,142
5	Aluminum flat top fi 75	0,185

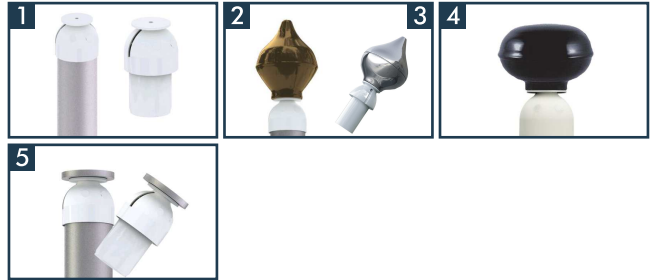

HALYARD SYSTEM		WEIGHT [kg]
1	Rope (kevlar) + swivel + distance ball	0,01 / mb + 0,07
2	Internal cleat [optional]	0,026
3	Hoisting winch [optional]	0,915
4	Windtracker arm	1,17
5	Flag weight	1,3
6	Plastic band (polyethylene)	0,034 / mb



INSTALLATION ELEMENT		WEIGHT [kg]
1	Ground sleeve 80/95 [5-10 m] (for foundation)	0,6/0,8
2	Hinged base plate 80/95/110 mm (for foundation)	8,15/9,45 10,75
3	Portable base (for paving stones sized 50x50cm) Installation using the upper part of hinged base plate.	18,6



Height [m]	5	6	7	8	9	10	12
Number of sections [pcs]	2	2	3	3	3	3	4
Flagpole diameter (top/bottom) [mm]	65/80	65/80	65/80/95	65/80/95	65/80/95	65/80/95	65/80/95/110
Net weight without accessories [kg]	10,3	10,3	18,2	18,2	21,8	21,8	28,5
Recommended size of the flag [m]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,5 x 5 [7,5 m ²]	1,5 x 5 [7,5 m ²]	1,5 x 5 [7,5 m ²]
Size of transport package [cm] ±5% + hinged base plate	350x9x9 350x32x30	380x9x9 380x32x30	360x11x11 360x32x30	360x11x11 360x32x30	420x11x11 420x32x30	420x11x11 420x32x30	380x20x12 380x32x30

Sectional flagpoles are made of 2 or more sections joined together using reduction sleeves

Flag display:
 Rotating truck head revolves because of the wind, the flag is always outstretched.

Flag fixing:
 rope with a distance ball, windtracker arm, plastic bands, flag weight

Hoisting and lowering of the flag:
 using internal halyard system with internal cleat or hoisting winch

TUBE PROFILE:
 Sectional aluminum


ANODIZING:
 20 microns

WALL THICKNESS:
 2/2,5 mm [5-6m]
 2/2,5/2,5 mm [7-8m]
 2/2,5/3,5 mm [9-10m]
 2/2,5/2,5/3,5 mm [12m]



AVAILABLE ACCESSORIES

FINIALS		WEIGHT [kg]
1	Rotating truck head	0,21
2	Golden bulb/round finial (brass)	0,22
3	Silver bulb/round finial (aluminum)	0,16
4	Black mushroom shaped top (aluminum)	0,142
5	Aluminum flat top fi 75	0,185

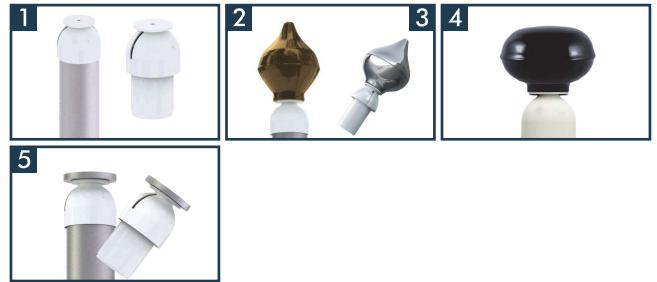

HALYARD SYSTEM		WEIGHT [kg]
1	Rope (kevlar) + swivel + distance ball	0,01 / mb + 0,07
2	Internal cleat [optional]	0,026
3	Hoisting winch [optional]	0,915
4	Windtracker arm	1,17
5	Flag weight	1,3
6	Plastic band (polyethylene)	0,034 / mb



INSTALLATION ELEMENT		WEIGHT [kg]
1	Ground sleeve 65/80/82,5 mm [5-10 m] (for foundation)	0,5/0,6/0,6
2	Hinged base plate 65/80/82,5/95 mm (for foundation)	6,95/8,15 8,15/9,45
3	Portable base (for paving stones sized 50x50cm) Installation using the upper part of hinged base plate.	18,6



	5	6	7	8	9	10	12
Height [m]	5	6	7	8	9	10	12
Number of sections [pcs]	2	2	3	3	3	3	4
Flagpole diameter (top/bottom) [mm]	50/65	50/65	50/65/80	50/65/80	50/65/82,5	50/65/82,5	50/65/80/95
Net weight without accessories [kg]	7,2	7,2	12,1	12,1	17,1	17,1	22
Recommended size of the flag [m]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,5 x 4 [6 m ²]	1,5 x 4 [6 m ²]	1,5 x 4 [6 m ²]
Size of transport package [cm] ±5%	320x8x8	380x8x8	370x14x9	360x14x9	420x14x9	420x14x9	390x18x11
+ hinged base plate	320x32x30	380x32x30	370x32x30	360x32x30	420x32x30	420x32x30	390x32x30