

Aluminum conical flagpoles are single construction products made of anodized aluminum tapered tube.

Flag display:
The flag display depends on gusts of wind.



Flag fixing:
rope and hooks
(attached to the flag)

Hoisting and lowering of the flag:
using an external rope fixed to the belying cleat mounted 1,5m above the ground


TUBE PROFILE:
Conical aluminum

ANODIZING:
20 microns

WALL THICKNESS:
3mm

AVAILABLE ACCESSORIES


FINIALS		WEIGHT [kg]
1	Rotating truck head	0,21
2	Golden bulb/round finial (brass)	0,22
3	Silver bulb/round finial (aluminum)	0,16
4	Black mushroom shaped top (aluminum)	0,142
5	Aluminum flat top fi 75	0,185

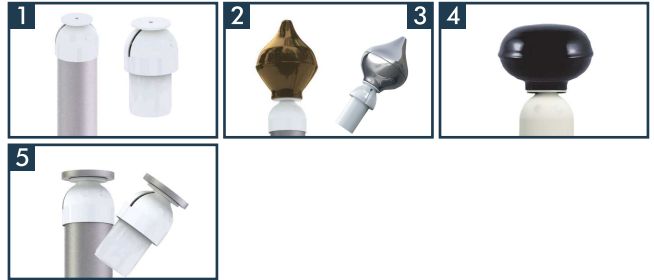

HALYARD SYSTEM		WEIGHT [kg]
1	Rope (polyester or polypropylene)	0,008 /mb
2	Belying cleat	0,026



INSTALLATION ELEMENT		WEIGHT [kg]
1	Hinged base plate 100/120/145mm (for foundation)	9,25/11,25 /12,95
2	Portable base (for paving stones sized 50x50cm) Installation using the upper part of hinged base plate.	18,6

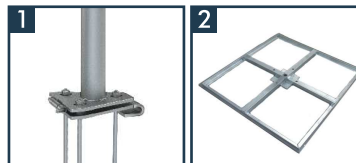

Height [m]	5	6	7	8	9	10	12
Number of sections [pcs]	1	1	1	1	1	1	1
Flagpole diameter (top/bottom) [mm]	60/100	60/100	60/100	60/100	60/120 v 60/145	60/145	60/145
Net weight without accessories [kg]	14	14	16	23,14	28,64	32,25	38,6
Recommended size of the flag [m]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,5 x 5 [7,5 m ²]	1,5 x 5 [7,5 m ²]	1,5 x 5 [7,5 m ²]
Size of transport package [cm] ±5% + hinged base plate	520x15x15 520x32x30	620x15x15 620x32x30	720x15x15 720x32x30	805x15x15 805x32x30	920x20x20 920x32x30	1020x20x20 1020x32x30	1220x20x20 1220x32x30