

Aluminum conical flagpoles are single construction products made of anodized aluminum tapered tube.

■ **AVAILABLE ACCESSORIES**


FINIALS		WEIGHT [kg]
1	Plastic cap	0,06
2	Rotating truck head	0,21
3	Golden bulb/round finial (brass)	0,22
4	Silver bulb/round finial (aluminum)	0,16
5	Black mushroom shaped top (aluminum)	0,142
6	Aluminum flat top fi 75	0,185



HALYARD SYSTEM		WEIGHT [kg]
1	Rope (kevlar) + swivel + distance ball	0,01 / mb + 0,09
2	Internal cleat [optional]	0,026
3	Hoisting winch [optional]	0,915
4	Flag weight	1,3
5	Plastic band (polyethylene)	0,034 / mb



INSTALLATION ELEMENT		WEIGHT [kg]
1	Hinged base plate 100/120/145mm (for foundation)	9,25/11,25 /12,95
2	Portable base (for paving stones sized 50x50cm) Installation using the upper part of hinged base plate.	18,6

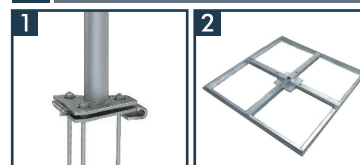

Flag display:
The flag display depends on gusts of wind.


Flag fixing:
rope with a distance ball, plastic bands, flag weight

Hoisting and lowering of the flag:
using internal halyard system with internal cleat or hoisting winch

TUBE PROFILE:
Conical aluminum

ANODIZING:
20 microns

WALL THICKNESS:
3mm

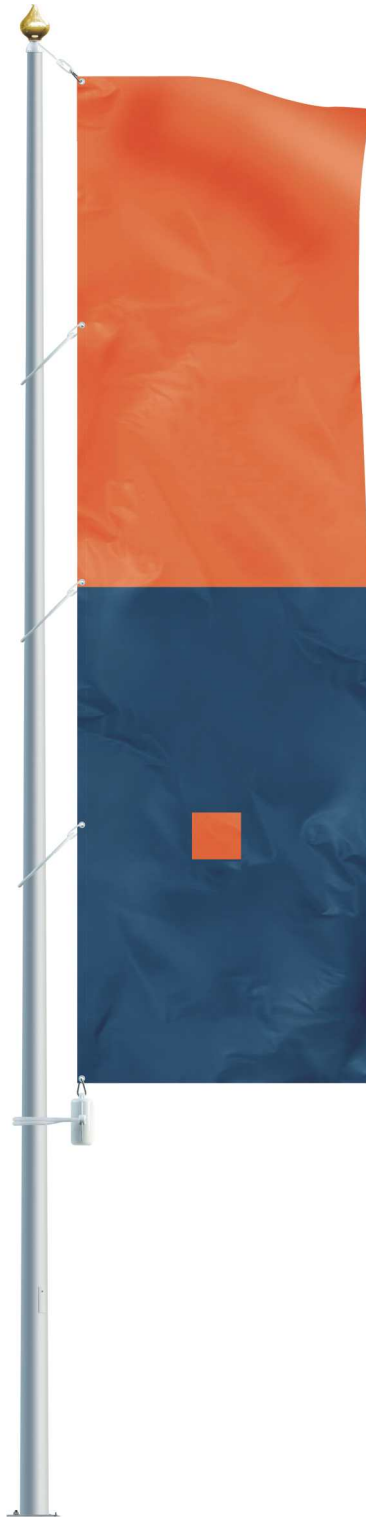

Height [m]	5	6	7	8	9	10	12
Number of sections [pcs]	1	1	1	1	1	1	1
Flagpole diameter (top/bottom) [mm]	60/100	60/100	60/100	60/100	60/120 v 60/145	60/145	60/145
Net weight without accessories [kg]	14	14	16	23,14	28,64	32,25	38,6
Recommended size of the flag [m]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,2x3,5 [4,2 m ²]	1,5 x 5 [7,5 m ²]	1,5 x 5 [7,5 m ²]	1,5 x 5 [7,5 m ²]
Size of transport package [cm] ±5% + hinged base plate	520x15x15 520x32x30	620x15x15 620x32x30	720x15x15 720x32x30	805x15x15 805x32x30	920x20x20 920x32x30	1020x20x20 1020x32x30	1220x20x20 1220x32x30